

ORDER INFORMATION

D B S - M X X - L

Standard Recommend

No. of contacts
(09,15,25,37,50)

Gold Platen	Standard
GA50 ^u	SA50 ^u
GA10 ^u	SA10 ^u
GC20 ^u	SC20 ^u
GD30 ^u	SD30 ^u
T:1in Platen	
TE:1in 200 ^u	

Wynohle Insulator
Ergolux Insulator
URBlue Insulator

T:1in shell
Nubical shell

Other accessories
 B:Rivet rivet #4-40 height=3.8
 C:Rivet rivet #4-40 height=5.8
 D:Rivet rivet #4-40 height=7.8
 E:Rivet rivet #3 height=5.8
 F:Rivet rivet #4-40 height=8.0
 G:Rivet rivet #4-40 height=9.0
 H:Rivet rivet #4-40 height=2.5
 I:Rivet rivet #4-40 height=4.0 + screw
 J:Rivet rivet boardlock #4-40
 K:Rivet rivet boardlock + screw #4-40

L:RoHS + P.B.T




SPECIFICATION




Current Rate:3 AMP
 Insulation Resistance:1000M Ω Min
 Contact Resistance:20m Ω Max
 Dielectric Voltage:500V AC for one minute
 Operation Temperature:-45°C to +105°C
MATERIAL
 Insulator:PBT+30% Glass Fiber(UL94V-0)
 Terminal:Copper Alloy

Dimension

Position	A±0.2	B±0.2	C±0.3
9	17.90	24.99	30.80
15	26.50	33.32	39.14
25	40.00	47.04	53.04
37	56.50	63.50	69.32

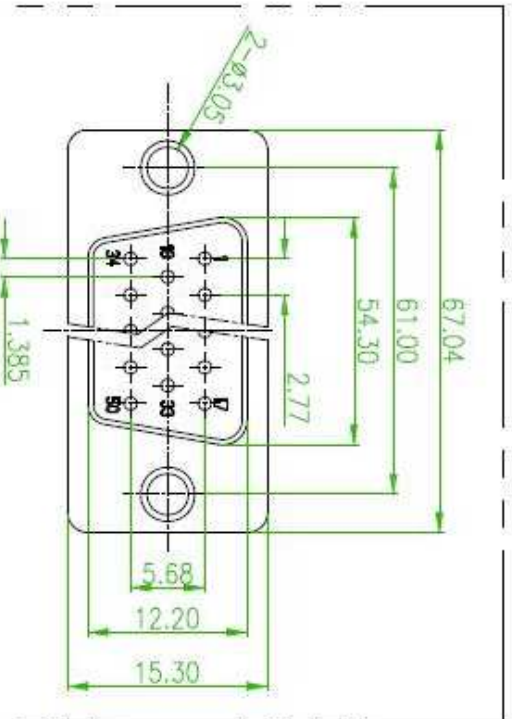

50pin Male Figure

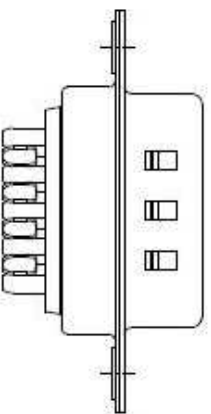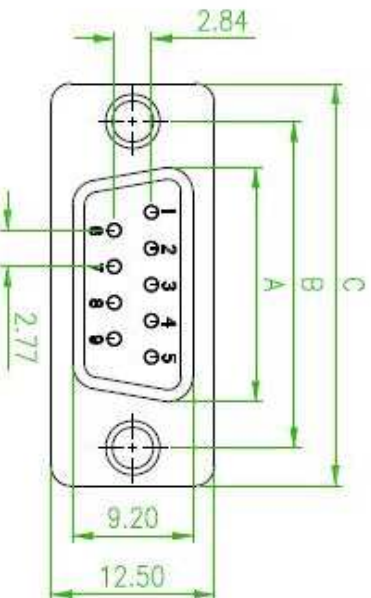

D-SUB SOLDER TYPE

品名 TITLE	DBS-MXX-L		日期 DATE	2010/01/28
品號 PART NO.	DBS-MXX-L		繪圖 DRAWN	Simy's
圖號 DRAWING NO.	DBS-MXX-L	版本 REV.	A	
客戶品號 CUSTOMER P/N		比例 SCALE	FREE	核對 CHECKED
公差 TOLERANCE	X ±0.38 XX +0.25	單位 UNIT	mm	核准 APPROVED
				James

AREA REV.

DESCRIPTION

DATE