


1 2 3 4 5 6 7 8 9 10

A  
B  
C  
D  
E  
F  
G


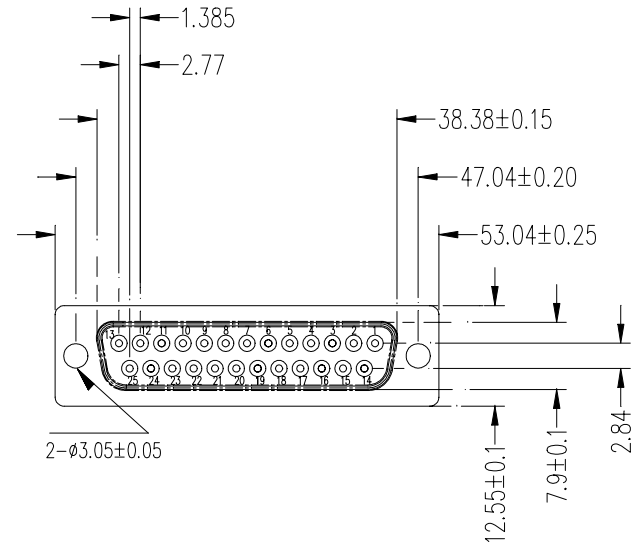




**MATERIAL**

Insulator : PBT + 30% Glass Fiber,(UL94V-0)  
 Contact : Brass.  
 Contact Plated : Gold Flash.  
 Shell : Nickel Plated and Tin Plated .

**SPECIFICATION**

Current Rate : 5Amps.  
 Insulation Resistance : 1000Megohms Minimum at 500V DC.  
 Dielectric Strength : 500V Per minute.  
 Operation Temperature : -55°C to +105°C.  
 Contact Resistance : 20 Milliohms Maximum.

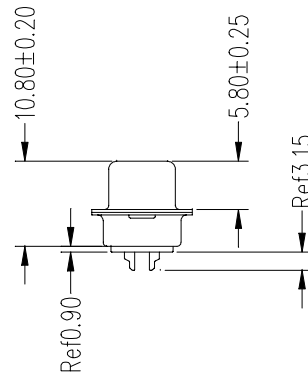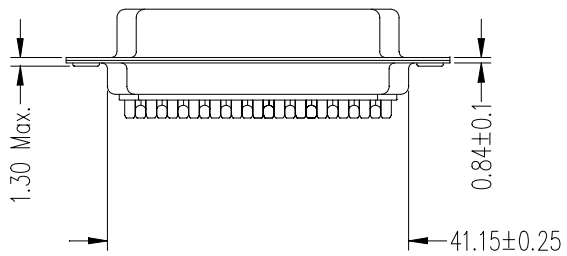

	TITLE: DB25 FEMALE,SOLDER TYPE		
	DATE:	JAN-31-2002	DESIGNED:
	DRAW NO.:	28611.1	APPROVED:
	SCALE:	1:1	ORDER NO.:
	REV:	1-0	
	UNIT: mm	TOLERANCE:	±0.20